


L=120

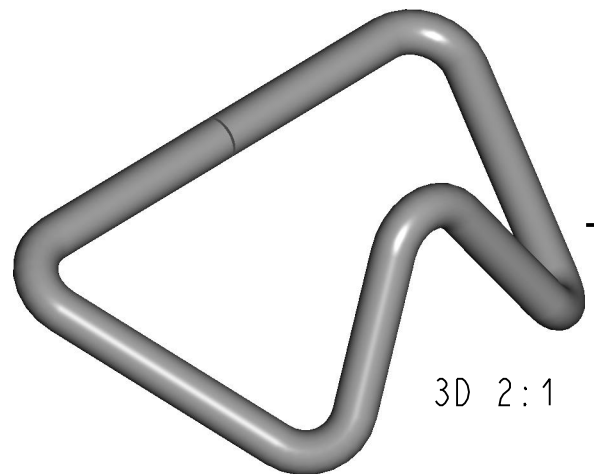

3D 2:1

1. ELEKTROLYTICKY VYLOUCENY POVLAK ISO 2081-Fe/Zn12/C
 VESKERE KOTY OBRABENYCH ROZMERU PLATI PO PROVEDENI POVRCH. UPRAVY

				UJ				2			
Typ	Ks	Poz.	Vykres sestaveni	Typ	Ks	Poz.	Vykres sestaveni				
Bez.cisla spolecna pro				Bez.cisla neplati pro							
PRESNOST	CSN EN ISO 13920-AE ISO 2768-mK		Mezni uchylky delkovych rozmeru (cast tab. 1 ISO 2768-1)								
TOLEROVANI PODLE ISO 8015	m		0.5 do 3	do 6	do 30	do 120	do 400	do 1000	do 2000	do 4000	
PROMITANI	c		±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	
Material	SPONOVY DRAT				Index	Zmena		Datum		Podpis	
Polotovar	KR 3		Cista hm.								
Meritko	2:1		Vypracoval: Douba C.v.vyst.: Douba Schvalil: Datum zmeny:		Podpis: Douba Podpis: Datum 15.03.2018						Pro/Engineer Wildfire 5
Název	DRZAK BATERIE - HACEK		Stary vykres:		Novy vykres						
				Listu				List			