


- NOTES:
1. REMOVE ALL BURRS AND SHARP EDGES.
 2. EVERY COMPONENT MUST BE CLEARLY IDENTIFIED WITH JOB PART NUMBER POSITION NOT CRITICAL.
 3. PART MAY BE PACKAGED FOR IDENTIFICATION PURPOSES.
 4. CORROSION PROTECTION TO JOB STANDARD STANDARD TYPE 1 COLOUR = WHITE OR SILVER GREY. ALL HOLE DIAMETERS AND TOL AFTER COATING.
 5. THIS IS A PROPRIETARY PART. JOB DO NOT OWN THE INTELLECTUAL PROPERTY. THIS DRAWING SHOULD NOT BE GIVEN TO OTHER SUPPLIERS WITHOUT WRITTEN CONSENT.

ALL DIMENSIONS IN mm IF IN DOUBT, ASK DO NOT SCALE DRAWING

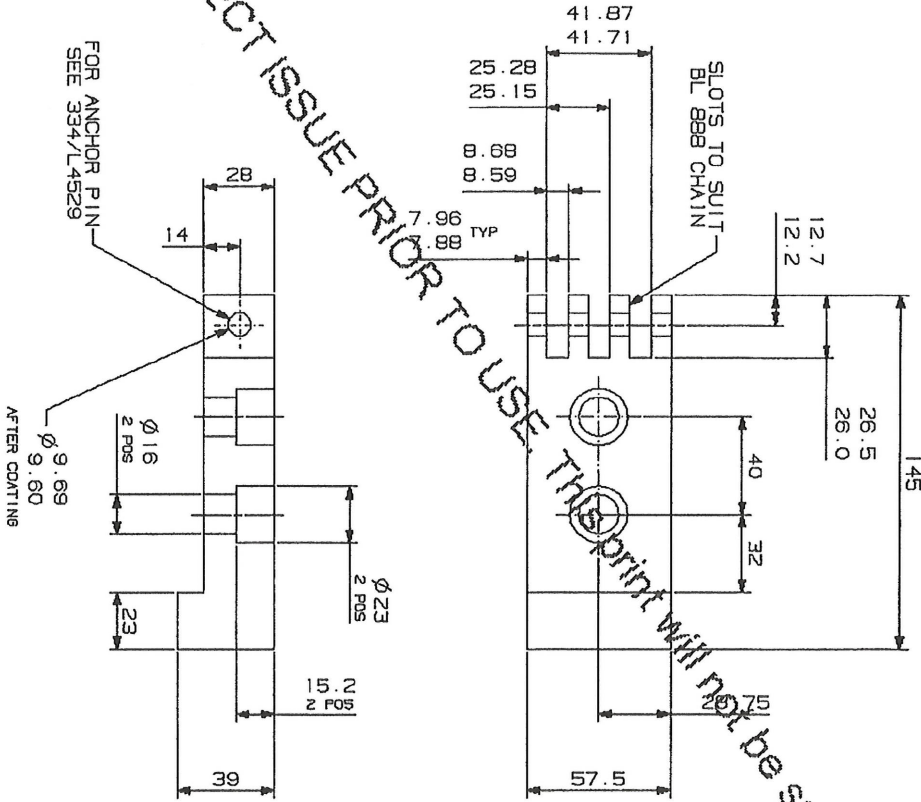

ISSUED 19/06/2018 : ENVSPEC

PRINT IS CORRECT ISSUE PRIOR TO USE. This print will not be subject to change

ph 1600

MATERIAL		5001/1050 - WROUGHT STEEL		TITLE		BL898 EXTENSION ANCHOR BLOCK	
FINISH		SEE NOTES		CLASSIFIED IN		Block (not valve)	
HEAT TREATMENT		SEE NOTES		DRAWING NUMBER		334/D4950	
DRAWN		DATE		BUSINESS UNIT		SHEET NUMBER	
B WESTRY		20/01/2016		LOADALL		1 OF 1	
DRAWN IN ACCORDANCE WITH STD 0024				MASS (kg)		SCALE	
PART HAS CODE C FEATURES WITH STD0029				1.64		A1 1:1	
				THIS DRAWING IS THE COPYRIGHT PROPERTY OF			

DESIGNED BY	DATE
REVISED BY	DATE
APPROVED BY	DATE
REVISION	DATE
1	20/01/2016
2	19/06/2018
3	19/06/2018