




ISSUED 19/06/2018 : EN5001/1050

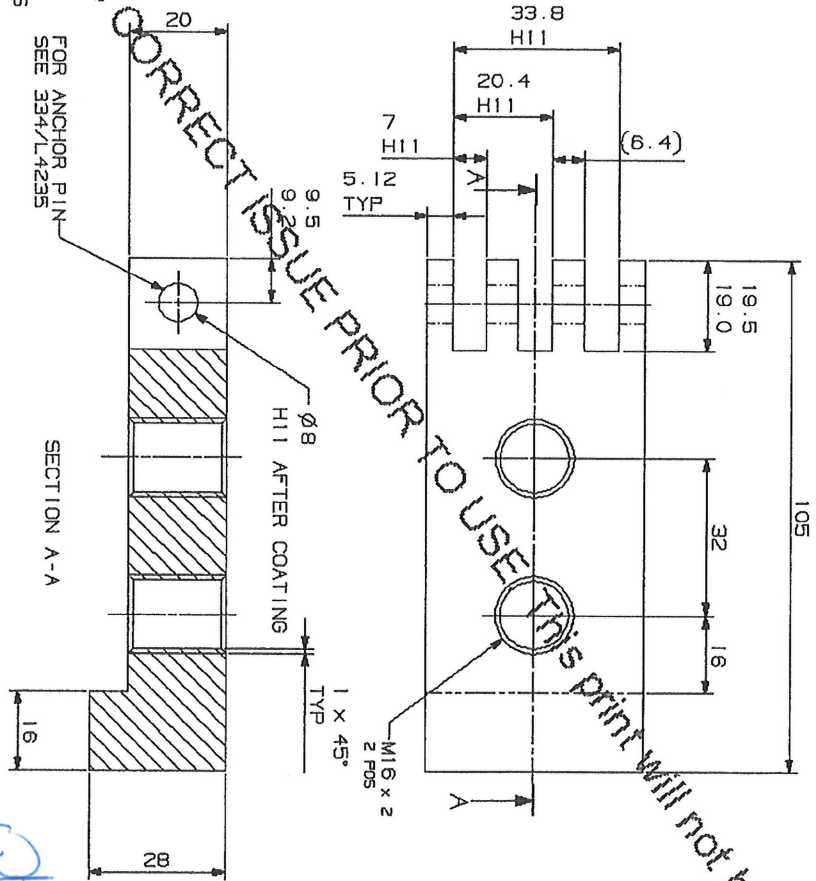

PICTORIAL VIEW FOR CLARITY



FOR ANCHOR PIN - SEE 334/L4235

SECTION A-A

H11 AFTER COATING

1 x 45° TYP

M16 x 2 2 POS

Qty: 1600

- NOTES:
1. REMOVE ALL BURRS AND SHARP EDGES.
  2. EVERY COMPONENT MUST BE CLEARLY IDENTIFIED WITH JOB PART NUMBER POSITION NOT CRITICAL.
  3. PART MAY BE PACKAGED FOR IDENTIFICATION PURPOSES
  4. CORROSION PROTECTION TO JOB STANDARD STD00017 TYPE 1 COLOUR = WHITE OR SILVER GREY. ALL HOLE DIAMETERS AND TOL AFTER COATING

LINEAR DEVIATIONS	PERMISSIBLE DEVIATIONS FOR SIZE RANGE																	
	0.5 UP TO 3		3 TO 6		6 TO 10		10 TO 30		30 TO 120		120 TO 400		400 TO 1000		1000 TO 2000		2000 TO 4000	
DIMENSION IN mm	0.2	0.3	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.8	0.9	0.9	
EXTERNAL RADI & CHAMFERS	10.4		11		12													

MATERIAL	5001/1050 - WROUGHT STEEL		TITLE	BL666 ANCHOR BLOCK STAGE 3	
FINISH	SEE NOTES		CLASSIFIED IN	BLOCK (not valve)	
HEAT TREATMENT	SEE NOTES		DRAWING NUMBER	334/L4222	
DRAWN	R CHAVAN	DATE	06/01/12	SHEET NUMBER	1 OF 1
DATE	06/01/12	BUSINESS UNIT	LOADALL	SCALE	1:1
PART HAS CODE C	DRAWN IN ACCORDANCE WITH STD 00023		MASS (kg)	0.650	
FEATURES IN ACCORDANCE WITH STD00023			THIS DRAWING IS THE COMPANION PROPERTY OF	AVE	

ALL DIMENSIONS IN mm IF IN DOUBT, ASK DO NOT SCALE DRAWING

ISSUED BY	DATE	DESIGNED BY	DATE
0.0 JMS	02/12		
0.0 JMS	02/12		
0.0 JMS	02/12		

