



Benzi luminatoare 4 cute GRECA G4

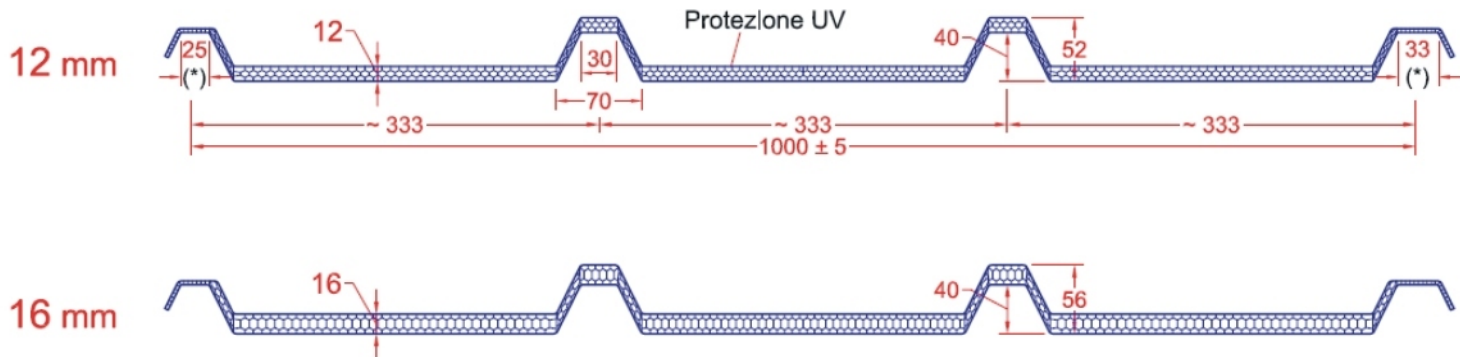

TECHNICAL DATA

Panel thickness	12 mm
Number of hooks	4
Hook distance	~333 mm
Panel modular width	~1000 ± 5 mm
Standard length	10000 mm
Length on request	max. 13500 mm
Dimension side hooks	25-35
Alternative dimension side hooks	from 20 mm to 40 mm
Curved panel	R = ~3500 mm - ~6000 mm
Colour	transparent satinized - opaline
Weight	~2,60 Kg/m ²
U.V. protection	on external side in coextrusion
End edges	heat sealed ends
Fire class, EN 13501-1	B s1 d0
Light transmittance	transparent ~61% - opaline ~45%
Thermal transmittance [U]	2,25 W/m ² K
Thermal expansion	0,065 mm/m °K
Temperature range	-40 / +120 °C

LOAD TABLE

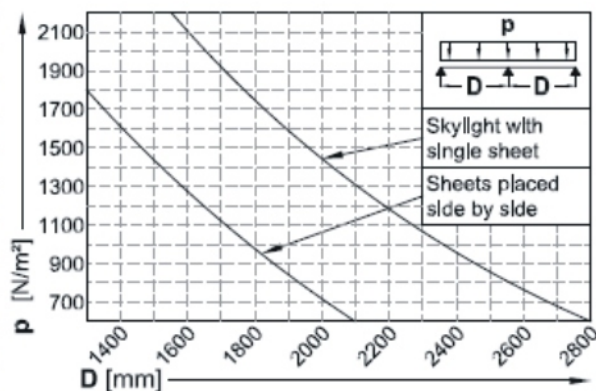

TECHNICAL DATA

Panel thickness	16 mm
Number of hooks	4
Hook distance	~333 mm
Panel modular width	~1000 ± 5 mm
Standard length	10000 mm
Length on request	max. 13500 mm
Dimension side hooks	25-35
Alternative dimension side hooks	from 20 mm to 40 mm
Curved panel	R = ~3500 mm - ~6000 mm
Colour	transparent satinized - opaline
Weight	~2,80 Kg/m ²
U.V. protection	on external side in coextrusion
End edges	heat sealed ends
Fire class, EN 13501-1	B s1 d0
Light transmittance	transparent ~55% - opaline ~40%
Thermal transmittance [U]	1,99 W/m ² K
Thermal expansion	0,065 mm/m °K
Temperature range	-40 / +120 °C

LOAD TABLE

